

# TRIPLE FUNCTION COMPACT INTEGRATED PA VERSION

MOD. 5361

PN 0,5-25

DN 1"

Male threaded connection, PA.



MOD. 5362

PN 0,5-16


DN 2"

Male threaded connection, PA.

## SPECIAL FEATURES

- Single type, very compact version fully automatic triple function for releasing air under pressure and during filling the pipe and bringing air in (anti-vacuum) during emptying the pipe.
- Performances according to the requirements of EN 1074.
- Body, cover and float from plastic material.
- Special rolling gasket for reliable function.
- Easily demountable for inspection and maintenance.
- Threads to EN ISO 228.
- Fully UV-resistant.
- Minimum operating pressure for watertight: 0,5 bar.

» **PERFORMANCES:**  
FUNCTIONAL DIAGRAM AT PAGE 5.14

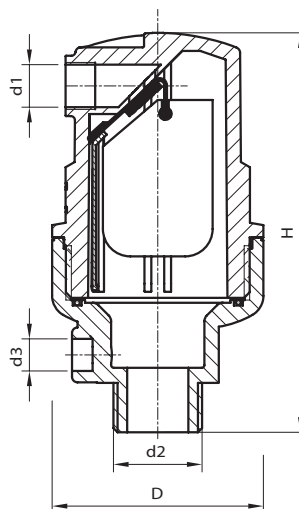

## MATERIALS

### Body:

Polyamide PA fibre glass reinforced

### Float:


Polypropylene foam

### Gasket:

Silicon rubber, potable water approved

### O-Rings:

NBR rubber, potable water approved

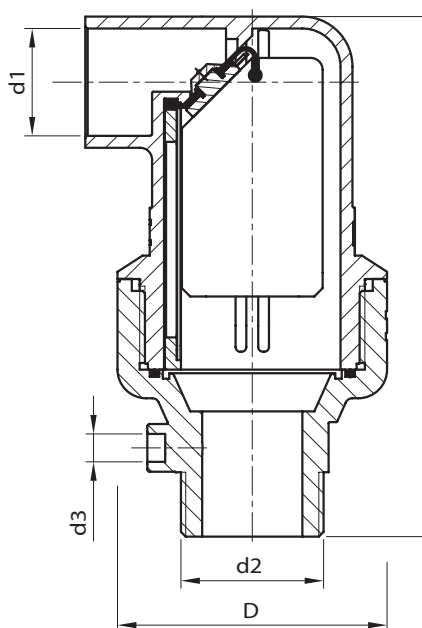

d2	PFA	H	D	d1	d3	Weight (kg)
1"	0,5-16/25	142	75	3/8"	1/4"	0,3
2"	0,5-16/25	275	112	2"	1/4"	1,1

All metal, rubber, and coatings used have been designed for contact with water for human consumption, pursuant to the terms of Italian Health Ministry decree n° 174, dated 6/4/2004.

