

STRAINER Y TYPE




MOD. 7900

PN 10/16

DN 40-400

Cast iron Y strainer flanged connections and stainless steel strainer.

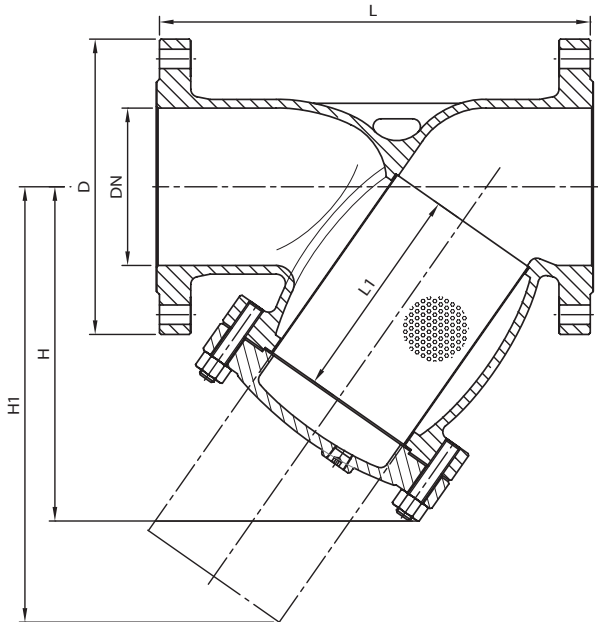

SPECIAL FEATURES

- Stainless steel filter superficially treated arranged in Y position to protect downstream devices.
- Body and lid internally and externally high quality epoxy coated (fusion bonded).
- Internal strainer in stainless steel easily removable for inspection and cleaning.
- Easy extraction of the filter for maintenance, cleaning and replacing.

MATERIALS

Body and lid

Cast iron EN GJL 250 EN 1561 (former to DIN GG25)

Filter

Stainless steel 14301 EN ISO 10088 (corresponding to AISI 304)

Gasket

NBR rubber

Bolts and nuts

Stainless steel A2-70 EN ISO 3506

DN	PN	D	L	L1	H	H1	Weight (kg)
40	10-16	150	200	101	132	182	7,1
50	10-16	165	230	115	156	213	10,1
65	10-16	185	290	147	176	250	14
80	10	200	310	160	199	273	20,3
	16	200	310	160	199	273	20,3
100	10-16	220	350	200	240	339	26,6
125	10-16	250	400	239	292	409	39,8
150	10-16	285	480	235	320	435	57
200	10	340	600	331	399	580	97
	16	340	600	331	399	580	97
250	10	395	730	456	516	776	163,5
	16	405	730	456	516	776	163,5
300	10	445	850	484	568	841	233,5
	16	460	850	484	568	841	233,5
350	10	505	980	540	648	948	312
	16	520	980	540	648	948	312
400	10	565	1100	650	759	1128	422
	16	580	1100	650	759	1128	422

All metal, rubber, and coatings used have been designed for contact with water for human consumption, pursuant to the terms of Italian Health Ministry decree n° 174, dated 6/4/2004.